




PVC TILES

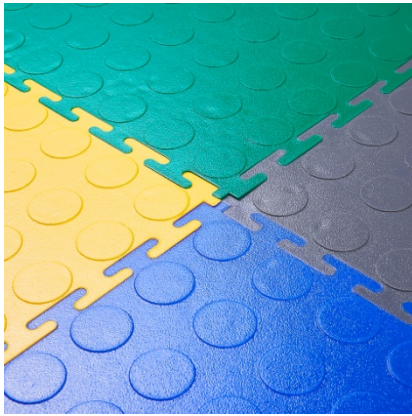

PVC interlocking tiles, provide a good environment of work place.

Easy to install, uninstall, heavy duty support, water proof.

SPECIFICATION

| PVC TILES | | | | | | |
|-----------|--|---------------|------------------|-----------------|---------------|---------------------|
| Item No. | Specific Gravity | Hardness (±5) | Tensile Strength | Slip resistance | Working Temp. | Elongation at Break |
| | g/cm3 | Shore A | N/mm2 | DIN51130:2014 | °C | % |
| | 1.16 | 90+/-2 | 623 | R9 | -10~+50 | 170 |
| Thickness | 5MM, 7MM | | | | | |
| Width | 500MM | | | | | |
| Length | 500MM | | | | | |
| Color | Black, White, Red, Green, Brown. | | | | | |
| Note | Virgin PVC with PU surface coating, with interlocking for easy installation, | | | | | |

| USE GUIDE | | | | | |
|---------------|----------------|------------------|------------|--------------------|---------------------|
| Thickness(mm) | even substrate | uneven substrate | pedestrian | Overload ≥400kg | Overload ≥5000kg |
| 5 | ✓ | × | ✓ | ✓ | × |
| 7 | ✓ | ✓ | ✓ | ✓ | ✓ |