




SBR Rubber Sheet

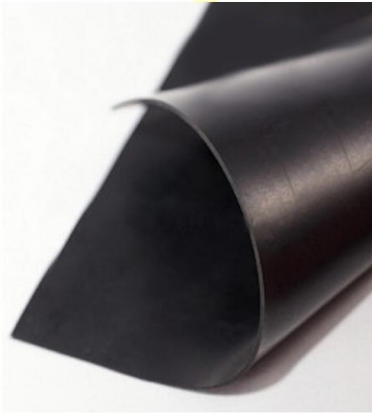

NR/SBR Rubber sheet: Styrene-butadiene Rubber Sheet (SBR Rubber) is mixed with Natural rubber. Owing to its molecular structure, it also have good acid/alkali resistance performance (At 24 degrees Celsius and 20% concentration of the acid solution). SBR Rubber sheet also has low compression set and high resilience and some other excellent physical performance.

SPECIFICATION

NR/SBR RUBBER SHEET						
Item No.	Specific Gravity	Hardness (±5)	Tensile Strength	Elongation at break	Working Temp.	Compression set
	g/cm ³	Shore A	MPA	%	°C	%
HK1001	1.7	65+/-5	2	180	-30 ~ +100	60
HK1002	1.6	65+/-5	3	200	-30 ~ +100	50
HK1003	1.5	65+/-5	4	250	-30 ~ +100	50
HK1004	1.5	65+/-5	4	200	-30 ~ +100	50
Thickness	1~50mm					
Width	1~1.5m					
Length	10~15m					
Color	Black, White, Red, Green, Brown.					
Note	One side or both side smooth or fabric surface can be supplied					

TEST:GB/T528-1998 GB/T3512-1989 GB/T531-1992(Air oven ageing 70°C, 72Hours)

Tensile Strength	≤25%
Elongation at Break	≤35%

RESISTANCE

Ozone	Oils	Concentrated acids and based	Dilute acids and based	Solvents
Normal	No	No	Normal	Normal